DINOTRACK WILDSET
BUILDING INSTRUCTIONS

STICKERS ASSEMBLY

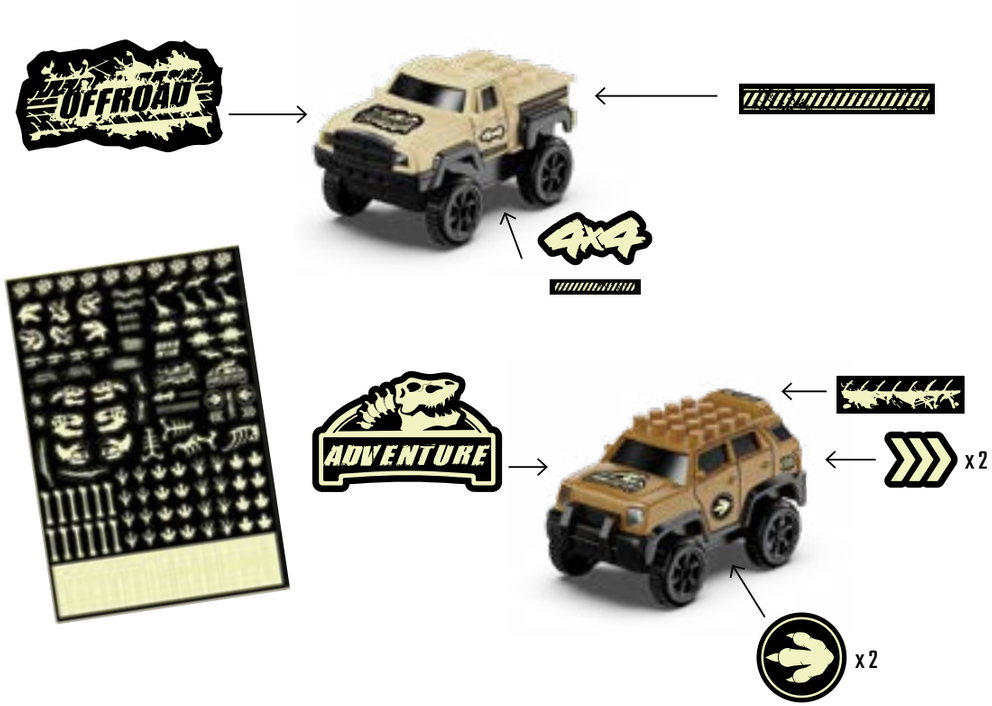

MAKE IT GLOW!

Apply Glow in the Dark stickers to tracks and accessories. Just use your creativity!

NOTE: For a long-lasting glow-in-the-dark effect, expose the loop & train tracks with the GID stickers to light for as long as possible. This can include indoor lights or natural light outdoors. Long exposure to light extends the glowing feature.

INSTRUCTIONS SHEET IS PART OF THE SET AND MUST REMAIN WITH IT AT ALL TIME

ITEM: **DINOTRACK WILD-SET**
Comply to ASTM F963 & CPSIA Toy Safety Standards
December 2025, Batch# S20251124,
SHANTOU, CHINA

MADE IN CHINA

Imported by: **JitteryGit**
Address: 4970 SW 52st Ave, Ste 324
Davie, FL 33314-5531

PLEASE NOTE These revised instructions have been created to address customer concerns. They have been updated from previous versions.

We appreciate your feedback and we're here to help. Before leaving any product complaints or bad reviews, please contact our customer service team at - info@jitterygit.com and we'll do all we can to resolve your issue.

WWW.JITTERYGIT.COM | INFO@JITTERYGIT.COM | @JITTERYGIT

LEGEND

* Refer back to these identifying images and descriptions of the included pieces as you follow the instructions.

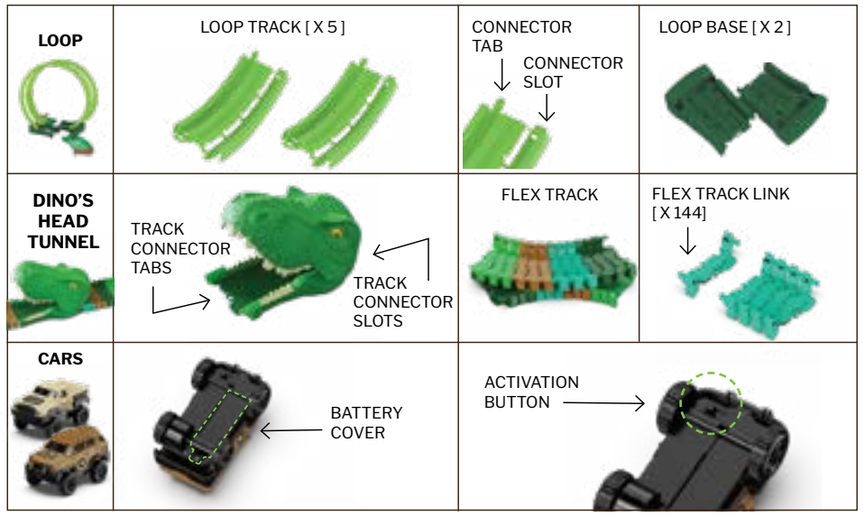

REQUIRED FOR ASSEMBLY:
For assembly, a Philips head screwdriver is needed but not included. A smaller screwdriver is recommended.
To operate the cars, two AA batteries are needed but not included. It is recommended to use strong batteries with long life from a well-known brand.

IMPORTANT NOTE BEFORE YOU BEGIN: ADULT ASSEMBLY IS REQUIRED

⚠ WARNING
CHOKING HAZARD - Small parts
Not for children under 3 years.

LOOP TRACK ASSEMBLY

NOTE: For each of the steps below, remember to apply gentle pressure as forced or hard pressure may damage the toy.

1. Take the two base pieces and attach them together in side-by-side position as shown. The upward ramps on each base must be facing in opposite directions. Fit the connector tabs into the connector slots until you hear a “click” sound. This means you have snapped the base pieces together correctly.

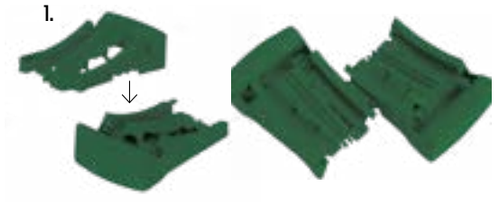

3. Next, attach a piece of loop track to the other base side following the same instructions above.

4. Go back to the first base piece and start adding additional pieces of loop tracks one on top of the other. Each time, listen for the “click sound” to ensure the pieces have been snapped together correctly.





2. It is now time to attach loop track pieces to the base pieces. First, you will attach a piece of loop track on one base side. Pick a base piece and insert the connector tab of a piece of loop track into its slots. Listen for a “click” to confirm the pieces have been snapped together correctly.

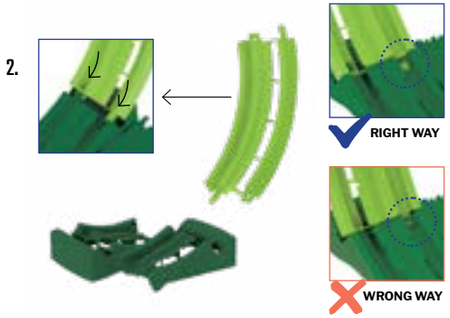

5. Connect the last loop track to the loop track on the opposite side to close the loop.

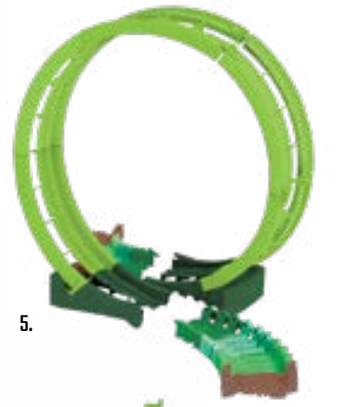

LOOP TRACK DISASSEMBLY

1. To remove the base pieces, hold the base side in one hand and the connected loop track piece in the other hand. Gently pull the pieces inwards and away from each other to disconnect. Applying too much force or pressure can damage the toy.

2. To disassemble the loop pieces, gently bend the pieces inward until they release apart from each other. Applying too much force or pressure can damage the toy. You will hear a click sound as you disassemble the pieces





DINO’S HEAD TUNNEL ASSEMBLY

Connect the track on either side of the tunnel by inserting the Track Connector Tabs on the pieces of track to the Connector Slots on the Dino Tunnel base (the Bottom Jaw).



TREE CONNECTION

Tilt the tree hook under the bottom of the track to attach it as shown.



CARS BATTERY INSTALLATION

1. Flip car over and gently unscrew the screw located in the back of the car.

NOTE: It is important not to apply too much pressure when unscrewing. The child safety screws are delicate and can become stripped, unaligned, or break if the screwdriver is not gently turned.



3. If the activation button test is successful, put the lid back down in place and listen for a loud click. This indicates the lid is back in place snugly and correctly. Do not screw the screw back in until you hear the loud click. If you have heard the click, gently screw the screw back into place.

2. Lift the battery compartment lid and insert 1 AA battery into position matching the battery’s positive contact head to the appropriate receptor as shown inside the battery case.

NOTE: Test whether the battery has been inserted correctly. Press the activation button to see if the car lights up and makes sounds.



NOTE: If the cover is not screwed back on so that it is flush flat to the bottom of the car, the car won’t travel around the loop track correctly.

4. Repeat steps 1-3 with the second car.

